

ONTEC R




ROBUSTHED OG ELEGANCE

- simpelt design af armaturet sikre en let og intuitiv installation
- ONTEC R garanterer overholdelse af alle standarder for sikrhedsbelysning
- muligheden for forsænket montering er en måde at diskret montere armaturet på et sted, hvor det er vigtigt at justere nødbelysningen til den eksisterende grundbelysning
- en bred vifte af lyskilder så vel som forsænket eller påmonterings muligheder gør det muligt at bruge det samme armatur
- forskellige versioner af lyskilde, samt muligheden for overflademontering, tillader at bruge det samme armatur på alle nødvendige steder


ROBUSTNESS AND ELEGANCE

- simple design of the fitting ensures its easy, intuitive installation
- ONTEC R guarantees compliance with all of the latest emergency lighting standards
- flush mounting option is a way of discrete installation of the fitting wherever matching of the emergency lighting to the existing basic lighting is essential
- wide range of light sources as well as flush and surface mounting options allow the use of the same fitting in any spot required



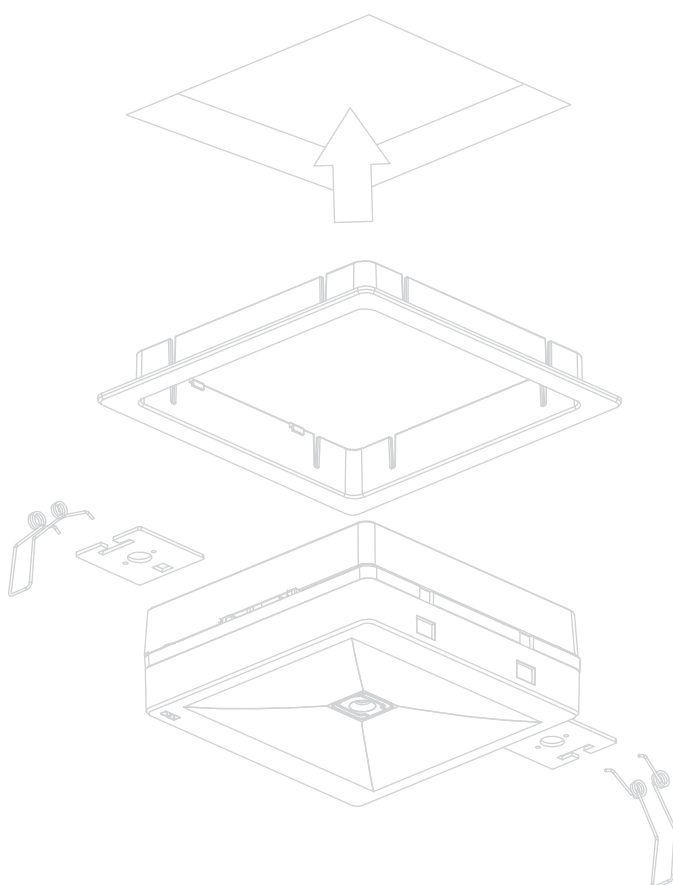

Dimensioner [mm]
Dimensions [mm]



+



=

Lyskilde Light source	LED
Anvendelse Application	ONTEC R M2, M5, S1, S2: panikbelysning / antipanic lighting ONTEC R C1, C2, F1, F2, W1, W2: flugtvejsbelysning / evacuation road lighting
Strømforsyning Power supply	210 ÷ 250V AC; 50 - 60HZ
Strømforsyning centralbatteri Power supply – CB	210 ÷ 250V AC; 50 - 60Hz 186 - 254 V DC
Beskyttelsestype Protection type	IP20
Isolations klasse Isolation class	II
Materiale Material	ONTEC R : Ramme / housing: PC
Farve Housing colour	☐ RAL 9003 ☐ RAL 7035 ☐ RAL 9004
Type Mode	M/NM
Nøddrift Autonomy	1h/3h
Temperatur intervaller Temperature range	t _g 10°C ÷ 35°C t _a -15°C ÷ 55°C (CB)
Standarder Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R M2 102 M ST	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	261 lm / 261 lm	TM-OR.M2.ST003
ONTEC R M2 102 M AT	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	261 lm / 261 lm	TM-OR.M2.AT002
ONTEC R M2 102 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	261 lm / 261 lm	TM-OR.M2.DT001
ONTEC R M2 102 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	261 lm / 261 lm	TM-OR.M2.DD001
ONTEC R M2 302 M ST	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	261 lm / 261 lm	TM-OR.M2.ST006
ONTEC R M2 302 M AT	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	261 lm / 261 lm	TM-OR.M2.AT003
ONTEC R M2 302 M DATA	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	261 lm / 261 lm	TM-OR.M2.DT002
ONTEC R M2 302 M DATA 2	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	261 lm / 261 lm	TM-OR.M2.DD002
ONTEC R M2 02 CB1	-	-	1 LED / 2W	-	261 lm / 261 lm	TM-OR.M2.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R S1 102 M ST	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	248 lm / 248 lm	TM-OR.S1.ST002
ONTEC R S1 102 M AT	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	248 lm / 248 lm	TM-OR.S1.AT002
ONTEC R S1 102 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	248 lm / 248 lm	TM-OR.S1.DT001
ONTEC R S1 102 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	248 lm / 248 lm	TM-OR.S1.DD003
ONTEC R S1 302 M ST	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	248 lm / 248 lm	TM-OR.S1.ST003
ONTEC R S1 302 M AT	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	248 lm / 248 lm	TM-OR.S1.AT003
ONTEC R S1 302 M DATA	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	248 lm / 248 lm	TM-OR.S1.DT002
ONTEC R S1 302 M DATA 2	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	248 lm / 248 lm	TM-OR.S1.DD002
ONTEC R S1 02 CB1	-	-	1 LED / 2W	-	248 lm / 248 lm	TM-OR.S1.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R C1 102 M ST	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	223 lm / 223 lm	TM-OR.C1.ST004
ONTEC R C1 102 M AT	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	223 lm / 223 lm	TM-OR.C1.AT003
ONTEC R C1 102 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	223 lm / 223 lm	TM-OR.C1.DT002
ONTEC R C1 102 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	223 lm / 223 lm	TM-OR.C1.DD003
ONTEC R C1 302 M ST	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	223 lm / 223 lm	TM-OR.C1.ST007
ONTEC R C1 302 M AT	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	223 lm / 223 lm	TM-OR.C1.AT004
ONTEC R C1 302 M DATA	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	223 lm / 223 lm	TM-OR.C1.DT003
ONTEC R C1 302 M DATA 2	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	223 lm / 223 lm	TM-OR.C1.DD002
ONTEC R C1 02 CB1	-	-	1 LED / 2W	-	223 lm / 223 lm	TM-OR.C1.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R F1 102 M ST	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	246 lm / 246 lm	TM-OR.F1.ST002
ONTEC R F1 102 M AT	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	246 lm / 246 lm	TM-OR.F1.AT002
ONTEC R F1 102 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	246 lm / 246 lm	TM-OR.F1.DT001
ONTEC R F1 102 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	246 lm / 246 lm	TM-OR.F1.DD002
ONTEC R F1 302 M ST	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	246 lm / 246 lm	TM-OR.F1.ST001
ONTEC R F1 302 M AT	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	246 lm / 246 lm	TM-OR.F1.AT003
ONTEC R F1 302 M DATA	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	246 lm / 246 lm	TM-OR.F1.DT002
ONTEC R F1 302 M DATA 2	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	246 lm / 246 lm	TM-OR.F1.DD003
ONTEC R F1 02 CB	-	-	1 LED / 2W	-	246 lm / 246 lm	TM-OR.F1.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R W1 102 M ST	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	233 lm / 233 lm	TM-OR.W1.ST002
ONTEC R W1 102 M AT	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	233 lm / 233 lm	TM-OR.W1.AT001
ONTEC R W1 102 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	233 lm / 233 lm	TM-OR.W1.DT001
ONTEC R W1 102 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	233 lm / 233 lm	TM-OR.W1.DD001
ONTEC R W1 302 M ST	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	233 lm / 233 lm	TM-OR.W1.ST001
ONTEC R W1 302 M AT	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	233 lm / 233 lm	TM-OR.W1.AT002
ONTEC R W1 302 M DATA	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	233 lm / 233 lm	TM-OR.W1.DT002
ONTEC R W1 302 M DATA 2	3h	LiFePO4/C 6.4V 1.5Ah	1 LED / 2W	M / NM	233 lm / 233 lm	TM-OR.W1.DD002
ONTEC R W1 02 CB1	-	-	1 LED / 2W	-	233 lm / 233 lm	TM-OR.W1.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R M5 105 M ST	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	503 lm / 503 lm	TM-OR.M5.ST002
ONTEC R M5 105 M AT	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	503 lm / 503 lm	TM-OR.M5.AT001
ONTEC R M5 105 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	503 lm / 503 lm	TM-OR.M5.DT001
ONTEC R M5 105 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	503 lm / 503 lm	TM-OR.M5.DD001
ONTEC R M5 305 M ST	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	503 lm / 503 lm	TM-OR.M5.ST003
ONTEC R M5 305 M AT	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	503 lm / 503 lm	TM-OR.M5.AT002
ONTEC R M5 305 M DATA	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	503 lm / 503 lm	TM-OR.M5.DT002
ONTEC R M5 305 M DATA 2	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	503 lm / 503 lm	TM-OR.M5.DD002
ONTEC R M5 05 CB1	-	-	2 LED / 5W	-	503 lm / 503 lm	TM-OR.M5.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R S2 105 M ST	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	477 lm / 477 lm	TM-OR.S2.ST003
ONTEC R S2 105 M AT	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	477 lm / 477 lm	TM-OR.S2.AT002
ONTEC R S2 105 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	477 lm / 477 lm	TM-OR.S2.DT002
ONTEC R S2 105 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	477 lm / 477 lm	TM-OR.S2.DD004
ONTEC R S2 305 M ST	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	477 lm / 477 lm	TM-OR.S2.ST002
ONTEC R S2 305 M AT	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	477 lm / 477 lm	TM-OR.S2.AT001
ONTEC R S2 305 M DATA	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	477 lm / 477 lm	TM-OR.S2.DT001
ONTEC R S2 305 M DATA 2	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	477 lm / 477 lm	TM-OR.S2.DD003
ONTEC R S2 05 CB1	-	-	2 LED / 5W	-	477 lm / 477 lm	TM-OR.S2.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R C2 105 M ST	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	421 lm / 421 lm	TM-OR.C2.ST002
ONTEC R C2 105 M AT	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	421 lm / 421 lm	TM-OR.C2.AT002
ONTEC R C2 105 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	421 lm / 421 lm	TM-OR.C2.DT001
ONTEC R C2 105 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	421 lm / 421 lm	TM-OR.C2.DD001
ONTEC R C2 305 M ST	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	421 lm / 421 lm	TM-OR.C2.ST001
ONTEC R C2 305 M AT	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	421 lm / 421 lm	TM-OR.C2.AT001
ONTEC R C2 305 M DATA	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	421 lm / 421 lm	TM-OR.C2.DT002
ONTEC R C2 305 M DATA 2	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	421 lm / 421 lm	TM-OR.C2.DD002
ONTEC R C2 05 CB1	-	-	2 LED / 5W	-	421 lm / 421 lm	TM-OR.C2.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R F2 105 M ST	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	462 lm / 462 lm	TM-OR.F2.ST001
ONTEC R F2 105 M AT	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	462 lm / 462 lm	TM-OR.F2.AT001
ONTEC R F2 105 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	462 lm / 462 lm	TM-OR.F2.DT001
ONTEC R F2 105 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	462 lm / 462 lm	TM-OR.F2.DD001
ONTEC R F2 305 M ST	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	462 lm / 462 lm	TM-OR.F2.ST002
ONTEC R F2 305 M AT	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	462 lm / 462 lm	TM-OR.F2.AT002
ONTEC R F2 305 M DATA	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	462 lm / 462 lm	TM-OR.F2.DT002
ONTEC R F2 305 M DATA 2	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	462 lm / 462 lm	TM-OR.F2.DD002
ONTEC R F2 05 CB1	-	-	2 LED / 5W	-	462 lm / 462 lm	TM-OR.F2.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC R W2 105 M ST	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	447 lm / 447 lm	TM-OR.W2.ST002
ONTEC R W2 105 M AT	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	447 lm / 447 lm	TM-OR.W2.AT001
ONTEC R W2 105 M DATA	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	447 lm / 447 lm	TM-OR.W2.DT001
ONTEC R W2 105 M DATA 2	1h	LiFePO4/C 6.4V 1.5Ah	2 LED / 5W	M / NM	447 lm / 447 lm	TM-OR.W2.DD001
ONTEC R W2 305 M ST	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	447 lm / 447 lm	TM-OR.W2.ST001
ONTEC R W2 305 M AT	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	447 lm / 447 lm	TM-OR.W2.AT002
ONTEC R W2 305 M DATA	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	447 lm / 447 lm	TM-OR.W2.DT002
ONTEC R W2 305 M DATA 2	3h	LiFePO4/C 6.4V 3.0Ah	2 LED / 5W	M / NM	447 lm / 447 lm	TM-OR.W2.DD002
ONTEC R W2 05 CB1	-	-	2 LED / 5W	-	447 lm / 447 lm	TM-OR.W2.CB001