

ONTTECE



DISKRET OG EFFEKTIVT

- et armatur med en luminans på 500 cd/m²
- long life komponenter (LiFePO₄) er brugt til produktion af dette armatur
- fås med indbygningskit for let og hurtig installation af armatur, også i forsænket version
- fantastisk synlighed af skiltet, pga. avanceret lys teknologiske løsninger og anvendelse af specielt materiale med nøje gennemskinnelige egenskaber


DISCRETE AND EFFICIENT

- fitting with a luminance of 500 cd/m²
- long life components (LiFePO₄) are used in the fitting production
- available flush mounting kit for easy and quick installation of the fitting, also in a recessed version
- guarantees excellent visibility of the sign through the application of advanced lighting technology solutions and special materials with high translucent characteristics



> 500 cd/m²
afhænger af version
depends on version






Vægmontering
Surfaced mounting




Forsænket montering
Recessed mounting

Dimensioner [mm]
Dimensions [mm]

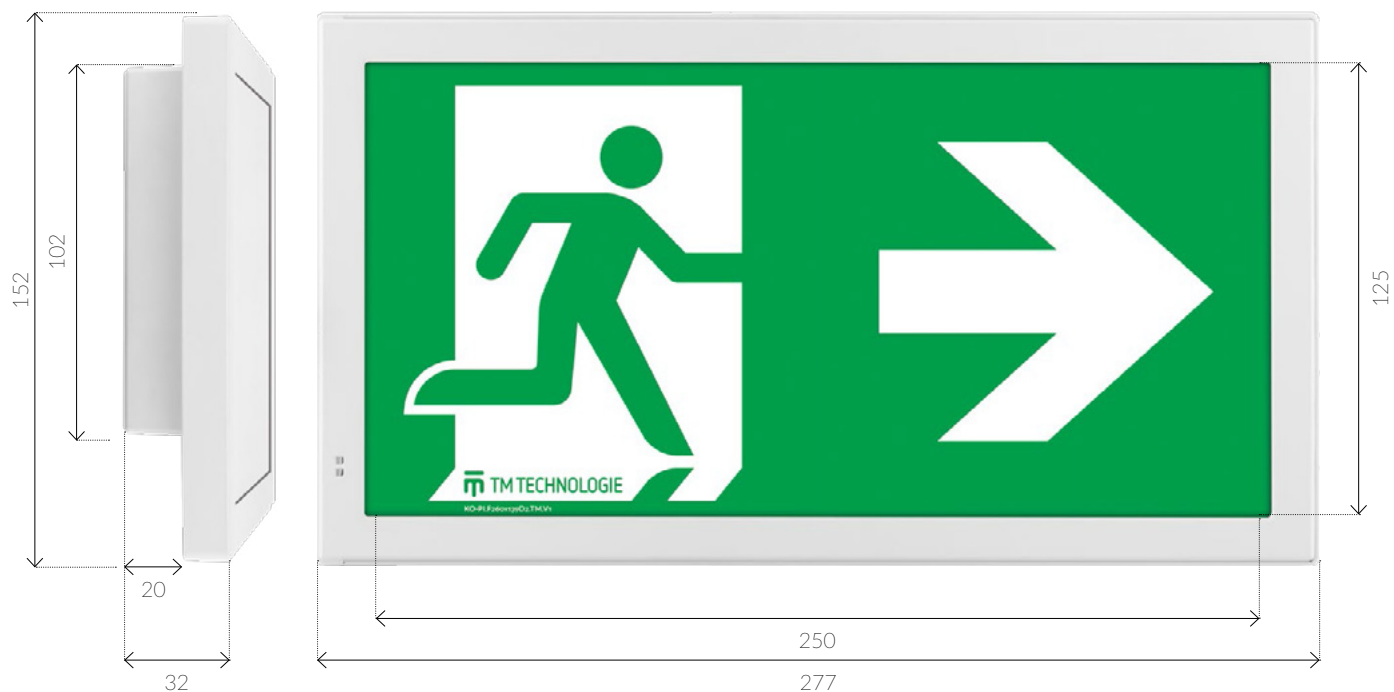

Lyskilde Light source	LED
Anvendelse Application	ONTEC E E1A, E1B, E1E, E1P Flugtvejs retning (Flugtvejsskilt) / evacuation road direction (evacuation sign)
Strømforsyning Power supply	210 ÷ 250V AC; 50 - 60HZ
Strømforsyning centralbatteri Power supply - CB	210 ÷ 250V AC; 50 - 60Hz 186 - 254 V DC
Beskyttelsestype Protection type	IP20
Isolations klasse Isolation class	II
Materiale Material	ONTEC E : Ramme / housing: PC Skærm / cover: PC
Farve Housing colour	<input type="checkbox"/> RAL 9003 <input type="checkbox"/> RAL 7035 <input type="checkbox"/> RAL 9004
Type Mode	M/NM
Nøddrift Autonomy	1h/3h
Temperatur intervaller Temperature range	t _a 10°C ÷ 35°C t _a -15°C ÷ 55°C (CB)
Standarder Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



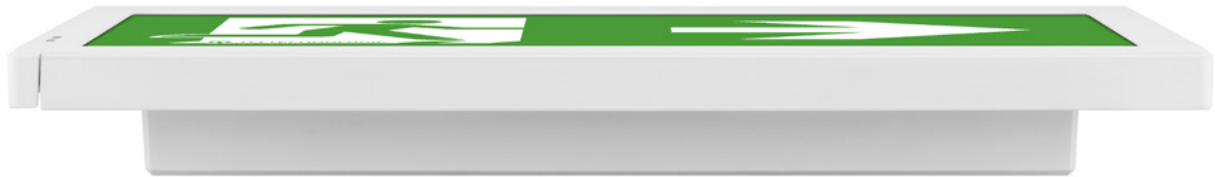

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC E E1A 101 NM ST	1h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	NM	>300 cd/m ²	TM-OE.EA.ST002
ONTEC E E1A 301 NM ST	3h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	NM	>300 cd/m ²	TM-OE.EA.ST001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC E E1B 101 M ST	1h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EB.ST003
ONTEC E E1B 101 M AT	1h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EB.AT002
ONTEC E E1B 101 M DATA	1h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EB.DT003
ONTEC E E1B 101 M DATA 2	1h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EB.DD001
ONTEC E E1B 301 M ST	3h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EB.ST002
ONTEC E E1B 301 M AT	3h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EB.AT001
ONTEC E E1B 301 M DATA	3h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EB.DT004
ONTEC E E1B 301 M DATA 2	3h	Ni-Cd HT 3.6V 0.8Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EB.DD002

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC E E1E 101 M ST	1h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EE.ST001
ONTEC E E1E 101 M AT	1h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EE.AT002
ONTEC E E1E 101 M DATA	1h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EE.DT002
ONTEC E E1E 101 M DATA 2	1h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EE.DD001
ONTEC E E1E 301 M ST	3h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EE.ST002
ONTEC E E1E 301 M AT	3h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EE.AT001
ONTEC E E1E 301 M DATA	3h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EE.DT001
ONTEC E E1E 301 M DATA 2	3h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>300 cd/m ²	TM-OE.EE.DD002
ONTEC E E1E 01 CB1	-	-	8 LED / 1W	-	>300 cd/m ²	TM-OE.EE.CB001

Model Model	Nøddrift længde Time	Batteri Battery Pack	Lyskilde Lightning source	Type Mode	Lysflow Luminous flux	NR NO.
ONTEC E E1P 101 M ST	1h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>500 cd/m ²	TM-OE.EP.ST002
ONTEC E E1P 101 M AT	1h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>500 cd/m ²	TM-OE.EP.AT001
ONTEC E E1P 101 M DATA	1h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>500 cd/m ²	TM-OE.EP.DT001
ONTEC E E1P 101 M DATA 2	1h	LiFePO4/C 6.4V 0.6Ah	8 LED / 1W	M / NM	>500 cd/m ²	TM-OE.EP.DD003
ONTEC E E1P 301 M ST	3h	LiFePO4/C 6.4V 1.5Ah	8 LED / 1W	M / NM	>500 cd/m ²	TM-OE.EP.ST001
ONTEC E E1P 301 M AT	3h	LiFePO4/C 6.4V 1.5Ah	8 LED / 1W	M / NM	>500 cd/m ²	TM-OE.EP.AT002
ONTEC E E1P 301 M DATA	3h	LiFePO4/C 6.4V 1.5Ah	8 LED / 1W	M / NM	>500 cd/m ²	TM-OE.EP.DT002
ONTEC E E1P 301 M DATA 2	3h	LiFePO4/C 6.4V 1.5Ah	8 LED / 1W	M / NM	>500 cd/m ²	TM-OE.EP.DD002
ONTEC E E1P 01 CB1	-	-	8 LED / 1W	-	>500 cd/m ²	TM-OE.EP.CB001